



OPzV 2Volt Cells (20yr Life)

MODEL	DESIGN LIFE IN FLOAT SERVICE AT 20 DEG °C	NOMINAL VOLTAGE V	NOMINAL CAPACITY @10 HR RATE AH	APPROX. DIMENSIONS (MM) Please refer to individual data sheets for full information.				STANDARD TERMINAL TYPE
				L	W	H	TH	
4OPzV200	20YRS	2	200	103	206	355	390	T11
5OPzV250	20YRS	2	250	124	206	355	390	T11
6OPzV300	20YRS	2	300	145	206	355	390	T11
5OPzV350	20YRS	2	350	124	206	471	506	T11
6OPzV420	20YRS	2	420	145	206	471	506	T11
7OPzV490	20YRS	2	490	166	206	471	506	T11
6OPzV600	20YRS	2	600	145	206	646	681	T11
8OPzV800	20YRS	2	800	191	210	646	681	T11
10OPzV1000	20YRS	2	1000	233	210	646	681	T11
12OPzV1200	20YRS	2	1200	275	210	646	681	T11
12OPzV1500	20YRS	2	1500	275	210	796	831	T11
16OPzV2000	20YRS	2	2000	399	210	772	807	T11

T11 Threaded Insert 8mm Stud

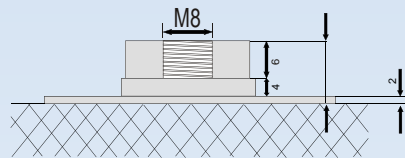

Torque 11.0 -14.7 Nm



This is a selection of our most popular models only. If the product you require is not listed here, please contact us or refer to our website – www.power-sonic.co.uk

For more information on these or other models, please refer to our datasheets or Battery Guide; All available on our website.