


PG Range


(12yr Design Life in Float Service at 20°C)

Dimensions (mm)

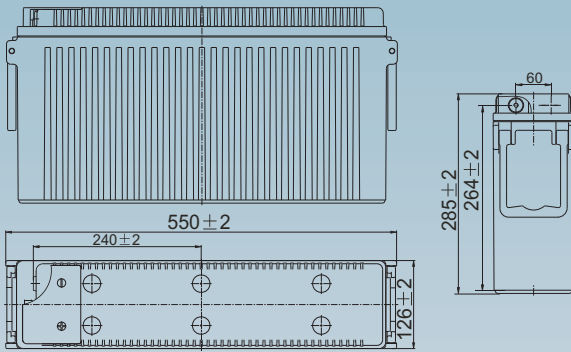

Standard terminal (mm)

T6 Threaded Insert 6mm Stud



Physical Specification

Nominal Voltage		12V
Nominal Capacity		180.0 AH
Dimension	Length	550 ± 2mm
	Width	126 ± 2mm
	Container Height	285 ± 2mm
	Total Height (with Terminal)	285 ± 2mm
Weight		51.0kg
Standard Terminal		T6

PGFT-12V180

IMAGE COMING SOON

Discharge Characteristics (25°C, 77°F)

Rated Capacity	20hr Rate(1.80V/cell) 10hr Rate(1.80V/cell) 8hr Rate(1.75V/cell) 5hr Rate(1.75V/cell) 1hr Rate(1.60V/cell)	180.0AH 170.0AH 160.8AH 148.0AH 110.5AH	Constant Voltage Charge	Cycle	Initial Charging Current Less than 54.0A Voltage 14.4V ~ 15.0V at 25°C (77°F)
					Capacity Affected by Temperature
	40°C (104°F)	103%			
	25°C (77°F)	100%			
	0°C (32°F)	86%			

Internal Resistance mΩ

Approx 3.2 mΩ

Constant Current Discharge Characteristics Unit: Amperes (25°C, 77°F)

F.V(V/cell)	10min	15min	20min	30min	45min	1H	2H	3H	4H	5H	6H	8H	10H	20H
1.85	245.8	216.2	193.8	158.8	122.4	98.9	57.7	42.2	33.8	28.4	24.6	19.5	16.3	8.61
1.80	285.6	249.6	216.2	170.7	129.4	103.5	59.8	43.7	34.9	29.2	25.2	20.2	17.0	9.00
1.75	315.2	268.6	230.5	177.5	133.5	106.6	61.1	44.4	35.3	29.6	25.6	20.5	17.2	9.09
1.70	335.6	281.5	239.7	183.6	136.0	108.3	62.0	45.0	35.8	29.9	25.9	20.8	17.4	9.15
1.65	350.9	291.0	244.8	187.3	138.9	110.5	62.8	45.4	36.2	30.3	26.2	21.0	17.5	9.20
1.60	366.2	299.2	251.9	191.3	141.0	112.2	63.6	46.0	36.5	30.6	26.4	21.2	17.7	9.25

Constant Power Discharge Characteristics Unit: Watts/Cell (25°C, 77°F)

F.V(V/cell)	10min	15min	20min	30min	45min	1H	2H	3H	4H	5H	6H	8H	10H	20H
1.85	459.0	407.8	369.2	305.8	237.7	192.8	113.2	83.1	66.8	56.2	48.8	38.9	32.5	17.2
1.80	527.1	464.4	405.9	323.7	249.4	200.7	116.5	85.6	68.5	57.6	49.9	40.2	33.9	18.0
1.75	572.4	493.8	428.7	333.9	254.9	205.7	118.7	86.7	69.2	58.1	50.5	40.7	34.3	18.1
1.70	595.8	510.4	442.4	343.5	258.7	208.3	120.1	87.7	70.0	58.5	51.0	41.1	34.6	18.2
1.67	620.6	525.5	450.0	349.8	263.4	212.0	121.5	88.3	70.6	59.2	51.4	41.5	34.9	18.3
1.60	629.8	529.5	456.6	352.2	264.4	213.2	121.9	88.7	70.9	59.5	51.7	41.8	35.1	18.4



Power-Sonic Europe Limited
 3 Buckingham Square, Wickford, Essex, SS11 8YQ
 Tel: +44 (0)1268 560686 Fax: +44 (0)1268 560902
 sales@power-sonic.co.uk
 www.power-sonic.co.uk