

PG Series


PG Series: 6-12 Volt Monoblocs (6/12yr Life)									
MODEL	DESIGN LIFE IN FLOAT SERVICE AT 20°C	NOMINAL VOLTAGE V	NOMINAL CAPACITY @20 HR RATE (Ah)	APPROXIMATE DIMENSIONS (MM)				STANDARD TERMINAL TYPE	CARTON QUANTITY
				PLEASE REFER TO INDIVIDUAL DATA SHEETS FOR FULL INFORMATION					
				L	W	H	TH		
PG6V160	12	6	160	260	180	247	253	T11	-
PG12V5.4	6	12	5.4	151	51	93	99	F1	10
PG12V6	6	12	6	90	70	101	107	F2	10
PG12V7.6	6	12	7.6	151	65	94	100	F2	5
PG12V9	6	12	8.5	151	65	95	100	F2	5
PG12V14	6	12	14	151	98	95	101	F2	4
PG12V21	6	12	21	182	77	167	167	T12	2
PG12V28	12	12	28	165	125	175	175	T12	2
PG12V30	12	12	30	166	176	125	125	T12	1
PG12V45	12	12	45	197	165	170	170	T6	1
PG12V60	12	12	60	228	138	208	211	T6	1
PG12V65	12	12	65	259	168	208	214	T6	1
PG12V80	12	12	80	259	168	208	214	T6	1
PG12V100	12	12	100	305	168	207	213	T6	1
PG12V110	12	12	110	330	173	212	220	T11	1
PG12V130	12	12	130	410	177	225	225	T11	1
PG12V150	12	12	150	344	171	274	280	T11	1
PG12V160	12	12	160	485	170	240	240	T11	1
PG12V220	12	12	220	522	240	218	224	T11	1

PG Series: 2 Volt Cells (15yr Life)									
MODEL	DESIGN LIFE IN FLOAT SERVICE AT 20°C	NOMINAL VOLTAGE V	NOMINAL CAPACITY @20 HR RATE (Ah)	APPROXIMATE DIMENSIONS (MM)				STANDARD TERMINAL TYPE	CARTON QUANTITY
				PLEASE REFER TO INDIVIDUAL DATA SHEETS FOR FULL INFORMATION					
				L	W	H	TH		
PG-2V80	15	2	80	170	72	205	212	T6	1
PG-2V110	15	2	107	170	72	205	212	T6	1
PG-2V160	15	2	160	170	98	205	212	T7	1
PG-2V215	15	2	214	170	110	328	350	T11	1
PG-2V270	15	2	270	170	110	328	350	T11	1
PG-2V325	15	2	325	170	150	328	350	T11	1
PG-2V375	15	2	374	170	150	328	350	T11	1
PG-2V430	15	2	430	210	175	330	350	T11	1
PG-2V480	15	2	480	210	175	330	350	T11	1
PG-2V540	15	2	540	240	175	330	350	T11	1
PG-2V650	15	2	645	300	175	330	350	T11	1
PG-2V860	15	2	860	410	175	330	351	T11	1
PG-2V1100	15	2	1060	475	175	328	350	T11	1
PG-2V1300	15	2	1284	475	175	328	350	T11	1
PG-2V1600	15	2	1600	400	350	343	375	T11	1
PG-2V2170	15	2	2140	490	350	339	349	T11	1
PG-2V2700	15	2	2700	490	350	339	349	T11	1
PG-2V3200	15	2	3200	709	350	337	349	T11	1

PG Series: 12 Volt Front Terminal Monoblocs (12yr Life)									
MODEL	DESIGN LIFE IN FLOAT SERVICE AT 20°C	NOMINAL VOLTAGE V	C20 CAPACITY TO 1.8V/C (Ah)	APPROXIMATE DIMENSIONS (MM)				STANDARD TERMINAL TYPE	CARTON QUANTITY
				PLEASE REFER TO INDIVIDUAL DATA SHEETS FOR FULL INFORMATION					
				L	W	H	TH		
PGFT12v110	12	12	110	508	110	238.5	238.5	T13	1
PGFT12v160	12	12	165	551	110	287	287	T6	1
PGFT12v180	12	12	180	560	126	280	280	T13	1

This is a selection of our most popular models only. If the product you require is not listed here, please contact us or refer to our website – www.power-sonic.co.uk

For more information on these or other models, please refer to our datasheets or Battery Guide; All available on our website.

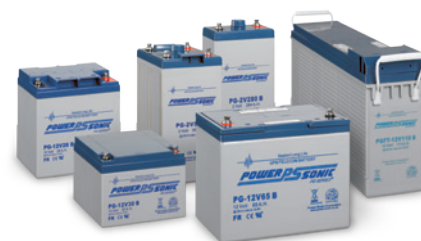

Minimum orders of non-stock models: PG range (38Ah and above) – 100pcs of any one model, <38Ah – 500pcs of any one model for special production of non-stock models.