



PS Range

(5yr Design Life in Float Service at 20°C)

Dimensions (mm)

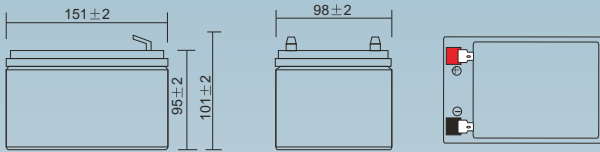

Standard terminal (mm)

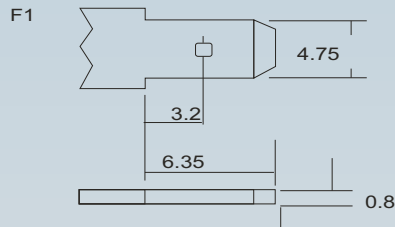

Physical Specification

Nominal Voltage		12V
Nominal Capacity (20HR)		12.0 AH
Dimension	Length	151 ± 2 mm
	Width	98 ± 2 mm
	Container Height	95 ± 2 mm
	Total Height (with terminal)	101 ± 2 mm
Weight		Approx 3.50kg
Standard Terminal		F1
Case and Cover Material		ABS (UL94-HB)

PS-12120 12V 12AH



Operating Temperature Range

Storage (In fully charged condition)	- 20°C to + 60°C
Charge	- 15°C to + 50°C
Discharge	- 20°C to + 60°C

Discharge Characteristics (25°C, 77°F)

Rated Capacity	20hRate(1.80V/cell)	12.00AH	Constant Voltage Charge	Cycle	Initial Charging Current Less than 3.0A Voltage 14.40V ~ 15.0V at 25°C (77°F)
	10hRate(1.80V/cell)	11.20AH			
Capacity Affected by Temperature	5hRate(1.75V/cell)	10.20AH	Standby	Recommended Charge Current less than 3.0A Voltage 13.5V ~ 13.8V at 25°C (77°F)	
	3hRate(1.75V/cell)	8.94AH			
	1hRate(1.60V/cell)	7.49AH			
	40°C (104°F)	103%			
	25°C (77°F)	100%			
	0°C (32°F)	86%			

Internal Resistance mΩ


14.0 mΩ

Constant Current Discharge (Amperes) at 25°C (77°F)

F.V(V/cell)	5min	10min	15min	20min	30min	45min	1H	2H	3H	4H	5H	6H	8H	10H	20H
1.85	22.9	15.2	12.5	11.0	9.0	7.04	5.83	3.58	2.70	2.22	1.88	1.63	1.30	1.08	0.594
1.80	27.4	18.2	14.7	12.6	10.1	7.73	6.31	3.84	2.88	2.36	1.98	1.70	1.34	1.12	0.600
1.75	32.8	20.9	16.4	13.9	10.8	8.27	6.67	4.00	2.98	2.42	2.03	1.75	1.38	1.14	0.606
1.70	38.1	23.3	18.0	15.1	11.5	8.67	6.96	4.14	3.05	2.47	2.08	1.79	1.40	1.16	0.617
1.65	42.0	25.3	19.3	16.2	12.1	9.06	7.20	4.27	3.14	2.54	2.12	1.82	1.42	1.18	0.625
1.60	46.3	27.3	20.8	17.1	12.8	9.42	7.49	4.38	3.21	2.60	2.17	1.86	1.45	1.20	0.629

Constant Power Discharge (Watts/cell) at 25°C (77°F)

F.V(V/cell)	5min	10min	15min	20min	30min	45min	1H	2H	3H	4H	5H	6H	8H	10H	20H
1.85	42.6	28.4	23.6	20.8	17.1	13.5	11.3	6.96	5.26	4.33	3.69	3.20	2.56	2.14	1.18
1.80	49.5	33.4	27.2	23.6	19.0	14.7	12.1	7.41	5.58	4.59	3.86	3.33	2.65	2.21	1.19
1.75	58.8	37.9	30.0	25.8	20.2	15.7	12.7	7.69	5.75	4.68	3.95	3.42	2.71	2.26	1.20
1.70	67.3	41.7	32.7	27.8	21.4	16.3	13.2	7.94	5.88	4.78	4.04	3.48	2.75	2.29	1.22
1.67	73.1	44.6	34.7	29.5	22.4	16.9	13.6	8.17	6.02	4.88	4.11	3.54	2.79	2.32	1.23
1.60	79.2	47.5	36.6	30.6	23.3	17.5	14.1	8.33	6.13	4.99	4.18	3.61	2.84	2.35	1.24



Power-Sonic Europe Limited
 3 Buckingham Square, Wickford, Essex, SS11 8YQ
 Tel: +44 (0)1268 560686 Fax: +44 (0)1268 560902
 sales@power-sonic.co.uk
 www.power-sonic.co.uk