



PS-OPzV Range (2V Tubular gel batteries)

OPzV 2Volt Cells (20yr Life)								
MODEL	DESIGN LIFE IN FLOAT SERVICE AT 20°C	NOMINAL VOLTAGE V	NOMINAL CAPACITY @10 HR RATE AH	APPROXIMATE DIMENSIONS (MM)				STANDARD TERMINAL TYPE
				PLEASE REFER TO INDIVIDUAL DATA SHEETS FOR FULL INFORMATION				
				L	W	H	TH	
40PzV200	20YRS	2	200	103	206	355	390	T11
50PzV250	20YRS	2	250	124	206	355	390	T11
60PzV300	20YRS	2	300	145	206	355	390	T11
50PzV350	20YRS	2	350	124	206	471	506	T11
60PzV420	20YRS	2	420	145	206	471	506	T11
70PzV490	20YRS	2	490	166	206	471	506	T11
60PzV600	20YRS	2	600	145	206	646	681	T11
80PzV800	20YRS	2	800	191	210	646	681	T11
100PzV1000	20YRS	2	1000	233	210	646	681	T11
120PzV1200	20YRS	2	1200	275	210	646	681	T11
120PzV1500	20YRS	2	1500	275	210	796	831	T11
160PzV2000	20YRS	2	2000	399	210	772	807	T11

T11 Threaded Insert 8mm Stud

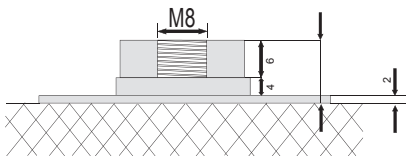

Torque 11.0 -14.7 Nm



This is a selection of our most popular models only. If the product you require is not listed here, please contact us or refer to our website – www.power-sonic.co.uk

For more information on these or other models, please refer to our datasheets or Battery Guide; All available on our website.

Minimum orders: OPzV range 100pcs of any one model for special production.